

CH8	line 1	0-255	R from bright to dark
CH9		0-255	B from bright to dark
CH10		0-255	G from bright to dark
CH11	line 2	0-255	R from bright to dark
CH12		0-255	B from bright to dark
CH13		0-255	G from bright to dark
CH14	line 3	0-255	R from bright to dark
CH15		0-255	B from bright to dark
CH16		0-255	G from bright to dark
CH17	line 4	0-255	R from bright to dark
CH18		0-255	B from bright to dark
CH19		0-255	G from bright to dark
CH20	line 5	0-255	R from bright to dark
CH21		0-255	B from bright to dark
CH22		0-255	G from bright to dark
CH23	line 6	0-255	R from bright to dark
CH24		0-255	B from bright to dark
CH25		0-255	G from bright to dark
CH26	line 7	0-255	R from bright to dark
CH27		0-255	B from bright to dark
CH28		0-255	G from bright to dark
CH29	line 8	0-255	R from bright to dark
CH30		0-255	B from bright to dark
CH31		0-255	G from bright to dark

3. Specification

■ Power and voltage: DC12V/120W

■ LEDS: $\phi 5-\phi 10$ RGB LED


■ Channels: 31 DMX512 channels

■ sound mode, DMX MODE, Master-slave mode

■ strobe effect, color change effect, shooting effect




LED Dance Floor

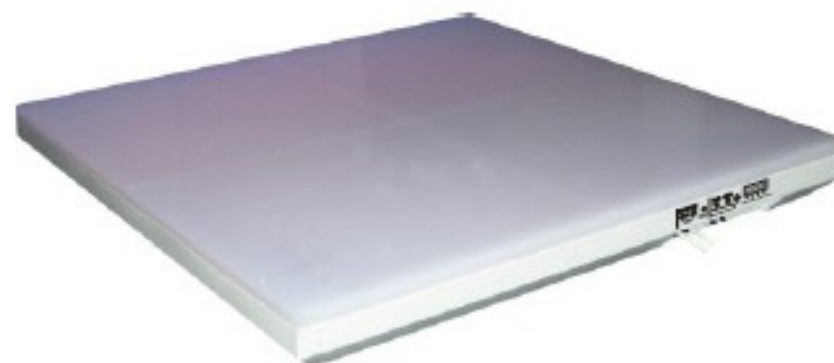

————— Operating Manual —————

1. Display show


MENU
ENTER:
UP:
DOWN:

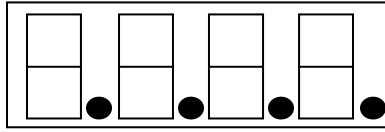


MENU ENTER UP DOWN

1. MENU OPERATION

d.001	⇒	d.512	⇒	DMX MODE
FF01	⇒	FF99	⇒	Auto mode 1
CC01	⇒	CC99	⇒	Auto mode 2
EE01	⇒	EE99	⇒	Radioactive workign mode
dEoo	⇒	dEoo	⇒	showing mode
SoUd	⇒	SoUd	⇒	Sound mode
SLAv	⇒	SLAv	⇒	Master-slave mode





MANU UP DOWN ENTER
 菜单 上 下 确定

2.Channels data

CH1	Rotation effect of 8lines	0-5	lighting off
		6-49	Rotating Function on the cross, no color in the base
		50-104	Rotating Function on the cross, color in the base
		105-154	Color rotation
		155-204	square effect rotation
		205-252	full color rotation
		253-255	Manual mode, start CH8-CH31 dimmer
CH2	rotation speed and direction of 8 lines	0-127	Corotation - speed adjustable
		128-255	Rollback--Speed adjustable
CH3	watering mode of 4 lines	0-63	off
		128	single watering effect
		192	two section method for watering effect
		255	full lighting
CH4	0-127shooting	0-18	R
		19-37	G
		38-55	B
		56-73	RG
		74-91	GB
		92-109	RB
		110-127	RGB
	128-255 Shrink	128-147	R
		148-165	G
		166-183	B
		184-201	RG
		202-219	GB
		220-237	RB
		238-255	RGB
CH5	shrink speed adjustable of shooting	0-255	from fast to slow
CH6	rotation speed of shooting	0-32	no rotation
		33-255	single rotation and speed adjustable
CH7	strobe	6-255	from fast to slow